


Type DE-710

Ultra-Flexible, Heavy Duty, Zinc Coated, Steel Conduit for OEM Applications

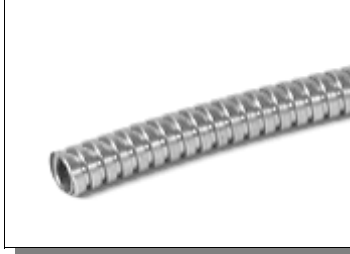

Square Locked Design

UPC	Inside Diameter Inches	Length	Min. Inside Bend Diameter (inches)
622620 52101 9	5/16	Random Coil	2.5
622620 52102 6	5/16	Random Reel	2.5
622620 52103 3	3/8	Random Coil	2.5
622620 52107 1	3/8	Random Reel	2.5
622620 52108 8	7/16	Random Coil	3
622620 52109 5	7/16	Random Reel	3
622620 52112 5	1/2	Random Coil	3
622620 52113 2	1/2	Random Reel	3
622620 52120 0	9/16	Random Coil	3
622620 52124 8	9/16	Random Reel	3

Long length reels available on special order.

Sealtite® Type DE-710 additional information

- Constructed of continuous, heavy duty, square locked, zinc coated steel strip.
- Ultra-flexible.
- Corrosion resistant.
- Rated to +230° C
- CSA & UL Component Wiring Program recognized for modular wiring systems.