


Type DSL

Ultra-Flexible, Light Duty, Zinc Coated, Steel Conduit for OEM Applications

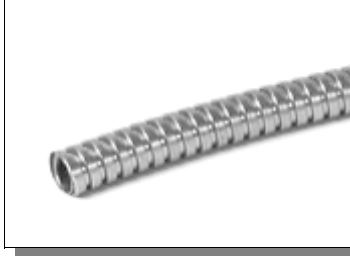

Square Locked Design

UPC	Inside Diameter Inches	Standard Length Meters / Feet	Min. Inside Bend Diameter (inches)
622620 60012 7	3/16	76 / 250	2
622620 60022 6	1/4	76 / 250	2
622620 60032 5	5/16	76 / 250	2.5
622620 60042 4	3/8	61 / 200	3
622620 60052 3	7/16	61 / 200	3
622620 60057 8	1/2	61 / 200	3
622620 60067 7	9/16	61 / 200	3
622620 60072 1	5/8	45 / 150	4
622620 60077 6	3/4	45 / 150	4

Sealtite® Type DSL additional information

- Constructed of continuous, square locked, zinc coated steel strip.
- Ultra-flexible.
- Corrosion resistant.
- Rated to +230° C