


SEALTITE® SERIES

SEALTITE® CW-BLUE COMPUTER FLEXIBLE CONDUIT

METALLIC
SEALTITE®

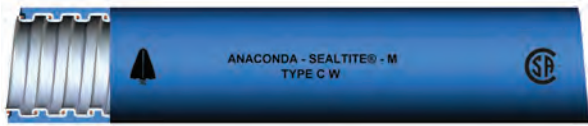

DESCRIPTION:

- Flexible metal core liquid-tight conduit
- Metal core wound with integral copper wire for EMI shielding
- Designed for computer applications in the Canadian market
- Also available by special order in other colours
- Sequentially meter marked for easier cutting and stock control
- Uses standard liquid-tight connectors for easy installation
- Available in custom cut lengths

SPECIFICATIONS:

- Galvanized steel core with liquid-tight PVC jacket
- Colour: blue
- Integral copper wire for electromagnetic interference suppression
- Temp. range: -20°C to +75°C (-4°F to +167°F)
- UV (sunlight) resistant
- Corrosion resistant
- Direct Burial rated
- 1/2" and 3/4" are FT-4 rated
- Sequentially meter marked
- CSA Approved # 17419

APPLICATIONS:

- Computer room wiring to designate computer wiring
- Other applications where additional EMI shielding is required



Square-Locked Design with integral bonding wire 1/2" - 1-1/4"

Interlocked Design 1-1/2" - 2" with no bonding wire



Trade Size	Item ID	Std. Pkg. m (ft)	Inside Diameter Min	Outside Diameter		Bend Radius	Weight kg/m (lbs/cft)
				Min	Max		
1/2" (16)	16061	30 (100)	15.80 (0.622)	20.80 (0.820)	21.30 (0.840)	76 (3.0)	0.42 (28)
	16064	300 (1000)					
3/4" (21)	16071	30 (100)	20.83 (0.820)	26.17 (1.030)	26.67 (1.050)	102 (4.0)	0.55 (37)
	16074	300 (1000)					
1" (27)	16081	30 (100)	26.44 (1.041)	32.80 (1.290)	33.40 (1.315)	163 (6.4)	0.80 (54)
	16083	150 (500)					
1-1/4" (35)	16090	15 (50)	35.05 (1.380)	41.40 (1.630)	42.20 (1.660)	178 (7.0)	1.13 (76)
	16092	75 (250)					
1-1/2" (41)	16100	15 (50)	40.01 (1.575)	47.40 (1.865)	48.30 (1.900)	140 (5.5)	1.45 (97)
	16104	45 (150)					
2" (53)	16110	15 (50)	51.31 (2.020)	59.40 (2.340)	60.30 (2.375)	178 (7.0)	1.67 (112)
	16111	30 (100)					

All dimensions in mm (inches) unless stated

FITTINGS FINDER



PAGE 33-38



PAGE 36



PAGE 41