


HIGH-TEMP SERIES

SEALTITE® HCX EXTREME TEMPERATURE FLEXIBLE CONDUIT

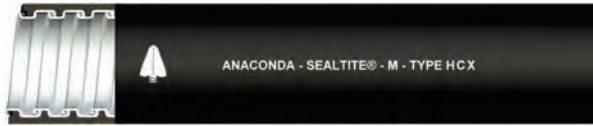

DESCRIPTION

- Flexible metal core liquid-tight conduit
- Designed for extreme temperature applications where superior resistance to temperature ranges is required. (-60°C to +150°C)
- Available standard in black
- Uses standard liquid-tight connectors for easy installation


SPECIFICATIONS

- Galvanized steel core with liquid-tight TPE jacket
- Colour: black
- Temp. range: -60°C to +150°C (-60°F to +150°F)
- UV (sunlight) resistant
- Extra corrosion resistant
- Oil resistant

APPLICATIONS

- Extreme duty applications
- Extreme high or low temperature requirements
- Applications where no approvals are required

METALLIC
SEALTITE®

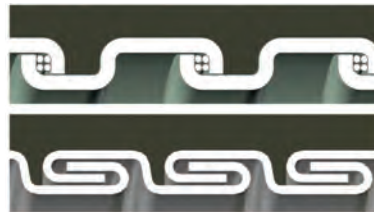

Square-Locked Design with
cord packing 3/8" - 1-1/4"

Interlocked Design 1-1/2"
- 2"



Trade Size	Item ID	Std. Pkg. m (ft)	Inside Diameter Min	Outside Diameter		Bend Radius	Weight kg/m (lbs/cft)
				Min	Max		
3/8" (12)	39102	30 (100)	12.32 (0.485)	17.53 (0.690)	18.03 (0.710)	51 (2.0)	0.31 (21)
1/2" (16)	39112	30 (100)	15.75 (0.620)	20.83 (0.820)	21.34 (0.840)	64 (2.5)	0.37 (25)
3/4" (21)	39122	30 (100)	20.70 (0.815)	26.16 (1.030)	26.67 (1.050)	76 (3.0)	0.58 (39)
1" (27)	39131	30 (100)	26.16 (1.030)	32.77 (1.290)	33.40 (1.315)	102 (4.0)	0.76 (51)
1-1/4" (35)	39141	15 (50)	34.80 (1.370)	41.53 (1.635)	42.16 (1.660)	115 (4.5)	0.98 (66)
1-1/2" (41)	39151	15 (50)	40.01 (1.575)	47.37 (1.865)	48.26 (1.900)	140 (5.5)	1.55 (104)
2" (53)	39161	15 (50)	51.31 (2.020)	59.44 (2.340)	60.33 (2.375)	176 (7.0)	2.02 (136)

All dimensions in mm (inches) unless stated

FITTINGS FINDER



PAGE 33-38



PAGE 36