


SEALTITE® SERIES

METALLIC
SEALTITE®

SEALTITE® HFSS ZERO HALOGEN, LOW SMOKE, LOW FLAME 316 STAINLESS STEEL CONDUIT

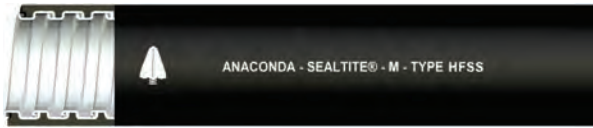

DESCRIPTION

- Constructed of continuously interlocked 316 stainless steel core for exceptional crush and corrosion resistance
- Durable, sunlight resistant, flame retardant, LOW SMOKE and ZERO HALOGEN TPU jacket that resists heat, oil and chemical breakdown
- Designed for most extreme temperature applications

SPECIFICATIONS

- 316 stainless steel core with liquid-tight PVC jacket
- Colour: black
- Temp. range: -51°F to +221°F (-40°C to +105°C)
- UV (sunlight) resistant
- Corrosion resistant

APPLICATIONS

- Applications of high and low temperature where a high level of corrosion resistance is required
- Safety applications where low smoke and zero halogen required
- Rail and infrastructure applications



Square-Locked Design with cord packing 3/8" - 1-1/4"

Interlocked Design 1-1/2" - 2"



Trade Size	Item ID	Std. Pkg. m (ft)	Inside Diameter Min	Outside Diameter		Bend Radius	Weight kg/m (lbs/cft)
				Min	Max		
3/8" (12)	49802	30 (100)	12.29 (0.484)	17.53 (0.690)	18.03 (0.710)	26 (2.0)	0.33 (22)
1/2" (16)	49812	30 (100)	16.31 (0.622)	20.82 (0.820)	21.33 (0.840)	32 (2.5)	0.36 (24)
3/4" (21)	49822	30 (100)	20.83 (0.820)	26.17 (1.030)	26.67 (1.050)	38 (3.0)	0.54 (36)
1" (27)	49831	30 (100)	26.44 (1.041)	32.80 (1.290)	33.40 (1.315)	51 (4.0)	0.74 (50)
1-1/4" (35)	49841	30 (100)	35.05 (1.380)	41.40 (1.630)	42.20 (1.660)	57 (4.5)	0.98 (66)
1-1/2" (41)	49851	30 (100)	40.01 (1.575)	47.40 (1.865)	48.30 (1.900)	70 (5.5)	1.46 (98)
2" (53)	49861	30 (100)	51.31 (2.020)	59.40 (2.340)	60.30 (2.375)	89 (7.0)	1.93 (130)

All dimensions in mm (inches) unless stated

FITTINGS FINDER



PAGE 33-38



PAGE 36