


HIGH-TEMP SERIES

SEALTITE® HTUA CSA/UL HIGH TEMPERATURE FLEXIBLE CONDUIT - CSA HEAVY DUTY

METALLIC
SEALTITE®

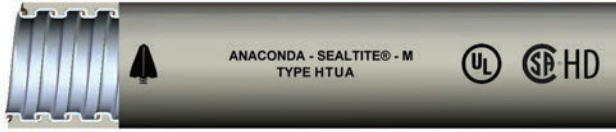

DESCRIPTION


- Flexible metal core liquid-tight conduit
- **CSA approved Heavy Duty.** Suitable for installation in Hazardous Locations per CEC Section 18: *Zone 2 per 18-152 1(h), Zone 21 per 18-202 4(a), Zone 22, per 18-252 1(h).*
- Suitable for use in hazardous locations per NEC: *Articles 501 Class I Div. 2, Article 502 Class II Div. 1 & 2, Article 503 Class III Div. 1 & 2.*
- Designed for applications exposed to higher temperature range with both CSA and UL approval.
- Approved for direct burial applications up to 4"
- CSA Approval achieved to Heavy Duty rating with ANAMET Compact Fittings and machined ferrule. (Page 33-38)

SPECIFICATIONS

- Galvanized steel core with liquid-tight PVC jacket
- Colour: grey (black available - special order)
- Temp. range: -46°C to +105°C (-51°F to + 221°F)
CSA max. +75°C Dry (+167°F)
- **CSA Heavy Duty** rated, 1/2" (16) to 4" (103).
- UV (sunlight) resistant, corrosion resistant
- CSA Approved #LL15275
- UL Approved #E18917

APPLICATIONS

- Applications for high and low temperature where UL and CSA approvals are required
- Hazardous locations per CEC/NEC



Square-Locked Design with integral bonding wire 3/8" - 1-1/4"

Interlocked Design 1-1/2" - 4" with no bonding wire



Trade Size	Item ID	Std. Pkg. m (ft)	Inside Diameter Min	Outside Diameter		Bend Radius	Weight kg/m (lbs/cft)
				Min	Max		
3/8" (12)	37402	30 (100)	12.29 (0.484)	17.50 (0.690)	18.00 (0.710)	76 (3.0)	0.36 (24)
	37404	244 (800)					
1/2" (16)	37412	30 (100)	15.80 (0.622)	20.80 (0.820)	21.30 (0.840)	89 (3.5)	0.43 (29)
	37414	152 (500)					
3/4" (21)	37422	30 (100)	20.83 (0.820)	26.17 (1.030)	26.67 (1.050)	127 (5.0)	0.64 (43)
	37428	152 (100)					
1" (27)	37431	30 (100)	26.44 (1.041)	32.80 (1.290)	33.40 (1.315)	153 (6.0)	1.09 (73)
	37438	122 (400)					
1-1/4" (35)	37441	15 (50)	35.05 (1.380)	41.40 (1.630)	42.20 (1.660)	178 (7.0)	1.49 (100)
	37448	76 (250)					
1-1/2" (41)	37451	15 (50)	40.01 (1.575)	47.40 (1.865)	48.30 (1.900)	140 (5.5)	1.67 (112)
	37454	46 (150)					
2" (53)	37461	15 (50)	51.31 (2.020)	59.40 (2.340)	60.30 (2.375)	178 (7.0)	2.20 (148)
	37468	30 (100)					
2-1/2" (63)	37471	15 (100)	62.99 (2.480)	72.10 (2.840)	73.00 (2.875)	242 (9.5)	2.69 (181)
3" (78)	37481	7.6 (25)	77.98 (3.070)	87.90 (3.460)	88.90 (3.500)	381 (15.0)	3.79 (255)
4" (103)	37491	7.6 (25)	101.60 (4.000)	113.30 (4.460)	114.30 (4.500)	432 (17.0)	5.37 (361)

All dimensions in mm (inches) unless stated

FITTINGS FINDER



PAGE 33-38



PAGE 36