


SEALTITE® SERIES

SEALTITE® UA UL & CSA APPROVED FLEXIBLE CONDUIT

METALLIC
SEALTITE®

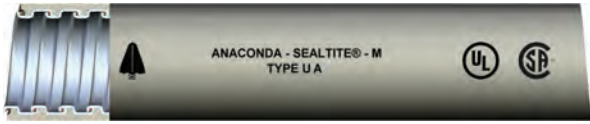

DESCRIPTION

- Flexible metal core liquid-tight conduit
- Designed for applications at OEMs where UL & CSA approval is required or desirable
- Approved for direct burial applications
- Also available in black by special order
- Uses standard liquid-tight connectors for easy installation
- CSA heavy duty rating pending

SPECIFICATIONS:

- Galvanized steel core with liquid-tight PVC jacket
- Colour: 3/8" to 2" grey, 2-1/2" to 4" black
- Temp. range: -20°C to +60°C (-4°F to + 140°F)
- UV (sunlight) resistant
- Corrosion resistant
- CSA Approved #LL15275
- UL Approved #E18917

APPLICATIONS:

- Applications where CSA and UL approvals are required



Square-Locked Design with integral bonding wire 3/8" - 1-1/4"

Interlocked Design 1-1/2" - 4" with no bonding wire



Trade Size	Item ID	Std. Pkg. m (ft)	Inside Diameter	Outside Diameter		Bend Radius	Weight Kg/M (lbs/cft)
			Min	Min	Max		
3/8" (12)	34202	30 (100)	12.29 (0.484)	17.53 (0.690)	18.00 (0.710)	76 (3.0)	0.37 (25)
1/2" (16)	34212	30 (100)	15.80 (0.622)	20.88 (0.822)	21.30 (0.840)	89 (3.5)	0.43 (29)
1/2" (16)	34213	305 (1000)					
3/4" (21)	34222	30 (100)	20.83 (0.820)	26.16 (1.030)	26.67 (1.050)	127 (5.0)	0.65 (44)
	34228	152 (500)					
1" (27)	34231	30 (100)	26.44 (1.041)	32.77 (1.290)	33.40 (1.315)	159 (6.3)	1.09 (73)
	34238	122 (400)					
1-1/4" (35)	34241	15 (50)	35.05 (1.380)	41.40 (1.630)	42.20 (1.660)	178 (7.0)	1.49 (100)
	34248	76 (250)					
1-1/2" (41)	34251	15 (100)	40.01 (1.575)	47.37 (1.865)	48.30 (1.900)	140 (5.5)	1.71 (112)
	34254	45 (150)					
2" (53)	34261	15 (50)	51.31 (2.020)	59.44 (2.340)	60.30 (2.375)	178 (7.0)	2.20 (148)
	34268	30 (100)					
2-1/2" (63)	34075	8 (27)	62.99 (2.480)	72.14 (2.840)	73.00 (2.875)	318 (9.5)	2.70 (182)
3" (78)	34085	8 (27)	77.98 (3.070)	87.88 (3.460)	88.90 (3.500)	381 (15.0)	3.79 (255)
4" (103)	34095	8 (27)	101.60 (4.000)	113.28 (4.460)	114.30 (4.500)	508 (17.0)	5.39 (362)

All dimensions in mm (inches) unless stated

FITTINGS FINDER



PAGE 33-38



PAGE 36



PAGE 41