

ANA-QUICK® NYLON SERIES FITTINGS

FLANGE 90° FITTING



SPECIFICATIONS:


- Made of specially modified polyamide (PA6)
- Free of halogen, phosphorus and cadmium
- Self-extinguishing
- Shock-resistant
- Temp. range: -40°C to +105°C (150°C short term)
- IP66 protection (IP68/IP69 with O-Ring and Sealing Washer)
- "Easy-click" quick assembly and removal of the conduit without tools
- Colour: black

DESCRIPTION:

The flange connectors are useful for fixing the ends of flexible corrugated conduits to 90° cable entries in the interior of machines and for installations according to EN 60204 (Safety of Machinery). They are notable for their high tensile strength and tightness.

FLANGE 90° FITTINGS

Size NW	Item ID	Dimensions mm (inches)					Std. Pkg.
		A	B	C	D	E	
17	AFNF-17B	44 (1.732)	68 (2.677)	29 (1.142)	24 (0.945)	48 (1.890)	50
23	AFNF-23B	53 (2.087)	82 (3.228)	37 (1.457)	26 (1.024)	57 (2.244)	30
29	AFNF-29B	60 (2.3622)	89 (3.504)	45 (1.772)	32 (1.260)	66 (2.598)	10
36	AFNF-36B	70 (2.756)	104 (4.095)	53 (2.087)	38 (1.496)	76 (2.992)	10
48	AFNF-48B	80 (3.150)	118 (4.646)	67 (2.638)	46 (1.811)	82 (3.228)	5

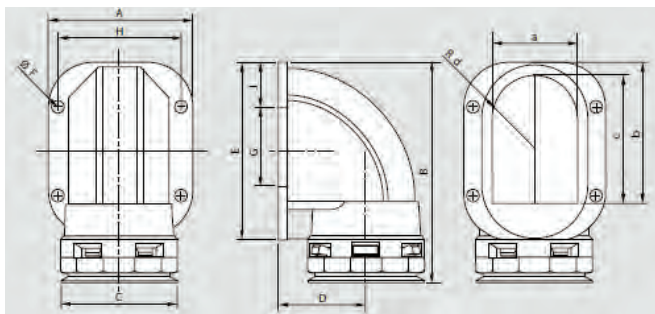

Lock nuts are NOT included with fittings.